


# Setting For-Each

Step 1 : Select Target Record element Record\_Type1-1.

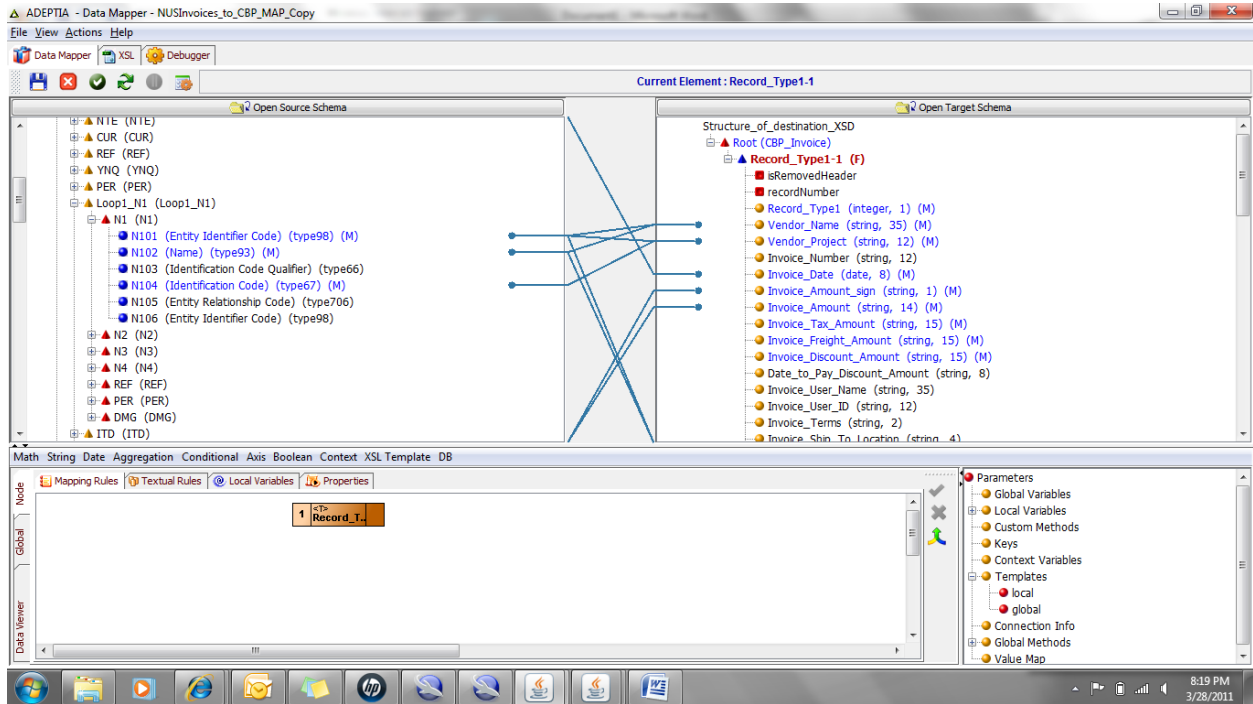

## Step 2 : Click on Properties tab in Mapping Graph Area.

The screenshot displays the ADEPTIA - Data Mapper interface for the mapping project 'NUSInvoices\_to\_CBP\_MAP\_Copy'. The main workspace is titled 'Current Element: Record\_Type1-1'. It is divided into two panes: 'Open Source Schema' on the left and 'Open Target Schema' on the right. The source schema shows a tree structure with elements like N1E, CUR, REF, YHQ, PER, Loop1\_N1, and N1 (N11-N106). The target schema shows 'Structure\_of\_destination\_XSD' with a root element 'Root (CBP\_Invoice)' and a child element 'Record\_Type1-1 (F)' containing various fields like recordNumber, Vendor\_Name, Invoice\_Number, etc. A mapping graph in the center shows lines connecting source elements to target elements. Below the main workspace, the 'Properties' tab is active, showing a table with columns for 'Nodes' and 'Properties'. The table contains the following data:

Nodes	Properties
xPath	/RootRecord_Type1-1
ForEach	
Sorting	Click here to add/view Sorting Rules
Disable-Output-Escaping	no

At the bottom right, the 'Parameters' panel is visible, showing categories like Global Variables, Local Variables, Custom Methods, Keys, Context Variables, Templates, local/global, Connection Info, Global Methods, and Value Map. The system tray at the bottom right shows the time as 8:22 PM on 3/28/2011.

Step 3 : Double click on the source element Loop1\_N1 and then click on Save Properties button.

